

INVENTRONICS



EUD-096SxxxBT

Rev. F



	(1)		(2)			(3)			
							120Vac	220Vac	
45-900mA	450-900mA	700 mA	90~305 Vac/ 127~300 Vdc	64~214 Vdc	96 W	91.0%	0.99	0.96	EUD-096S090BT
90-1800mA	900-1800mA	1050 mA	90~305 Vac/ 127~300 Vdc	32~107 Vdc	96 W	90.5%	0.99	0.96	EUD-096S180BT ⁽⁴⁾
180-3600mA	1800-3600mA	2100 mA	90~305 Vac/ 127~300 Vdc	16 ~ 53 Vdc	96 W	90.0%	0.99	0.96	EUD-096S360BT ⁽⁵⁾

I-V




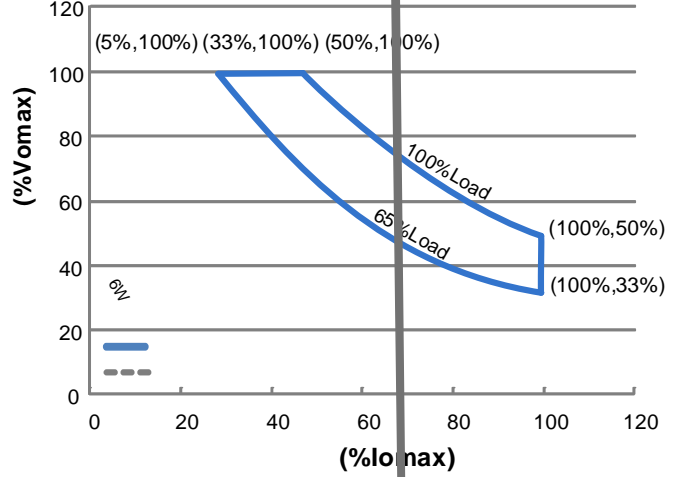
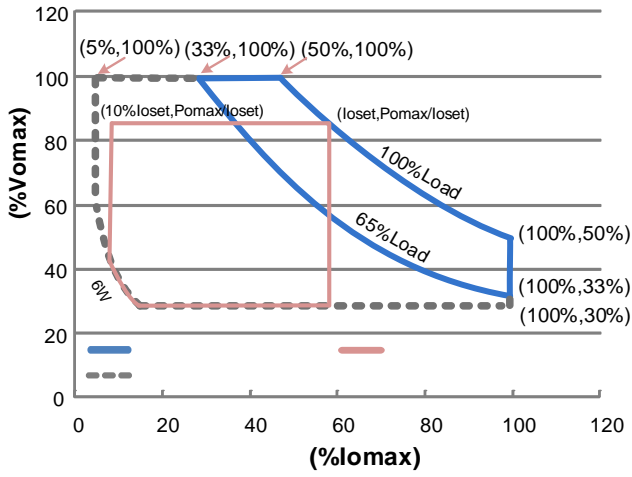


	-	212,000 Hours	-	
	-	111,000 Hours	-	
	-40°C	-	+86.6°C	
	-40°C	-	+70°C	: 10%RH to 95%RH
	-40°C	-	+85°C	: 5%RH to 95%RH
	7.64 × 2.66 × 1.44 194 × 67.5 × 36.5			8.70 × 2.66 × 1.44 221 × 67.5 × 36.5
	-	985 g	-	

	9.5V	16V	22.5V	
	-6.5V	0V	6.5V	
	0mA	-	2mA	
	10%loset	-	loset	50%lomax ≤ loset ≤ 100%lomax
	5%lomax	-	loset	5%lomax ≤ loset < 50%lomax

UL/CUL	UL 8750,UL1310,CAN/CSA-C22.2 No. 250.13,CAN/CSA-C22.2 No. 223-M91
CE ⁽¹⁾	EN 61347-1, EN 61347-2-13
KS	KS C 7655
EN 55015 ⁽²⁾	Conducted emission Test &Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage Fluctuations & Flicker

FCC Part 15 ⁽²⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS	
EN 61000-4-2	Electrostatic Discharge(ESD): 8kV air discharge, 4kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient/Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment
DALI	

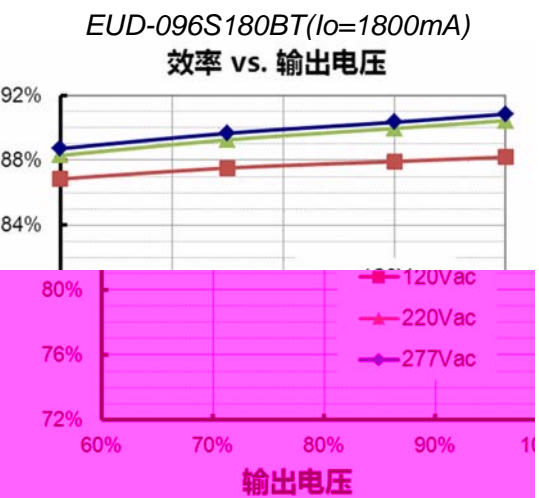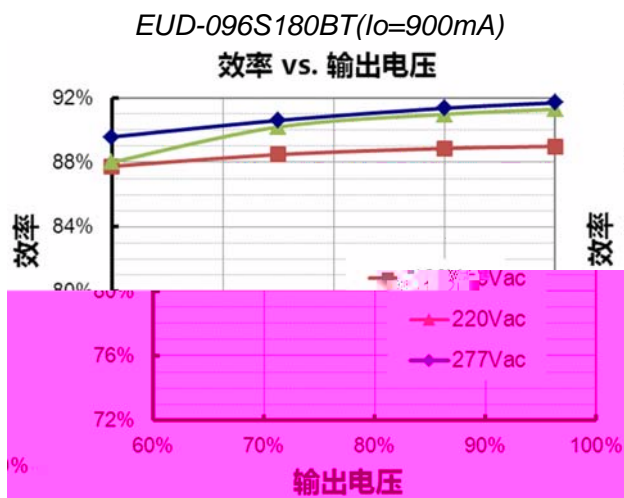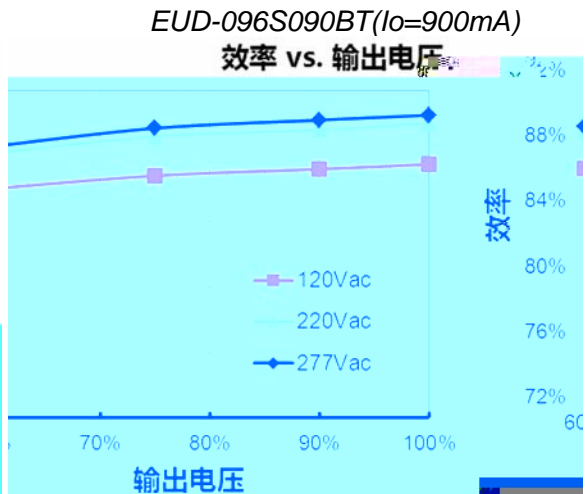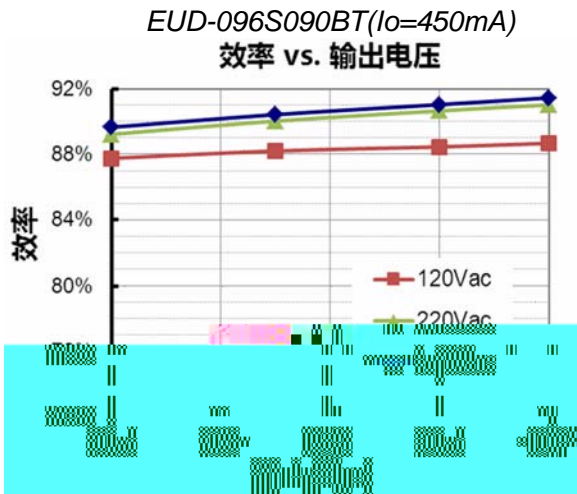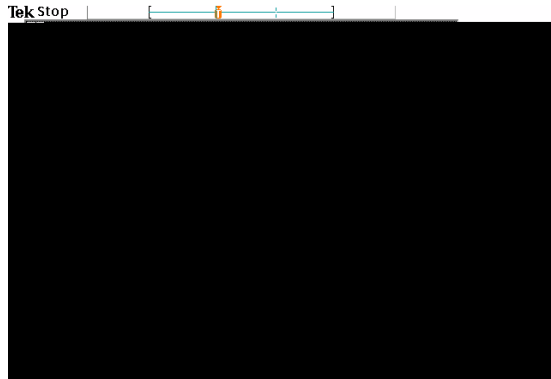

INVENTRONICS

EUD-096SxxxBT

Rev. F

INVENTRONICS


EUD-096SxxxBT

Rev. F

INVENTRONICS

EUD-096SxxxBT

Rev. F

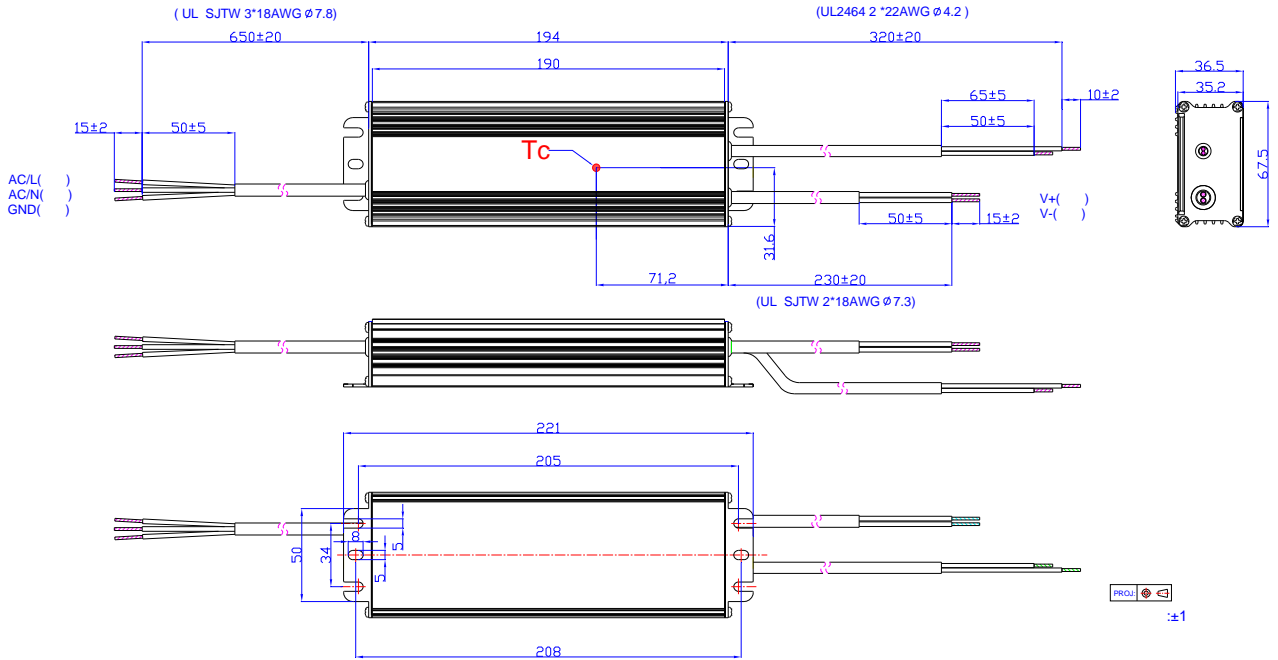

			86 C	86.6 C

INVENTRONICS

EUD-096SxxxBT

Rev. F
